
Technical Specifications



1. Power Button

Technical Specifications

HP Z27u G3 QHD USB-C Display

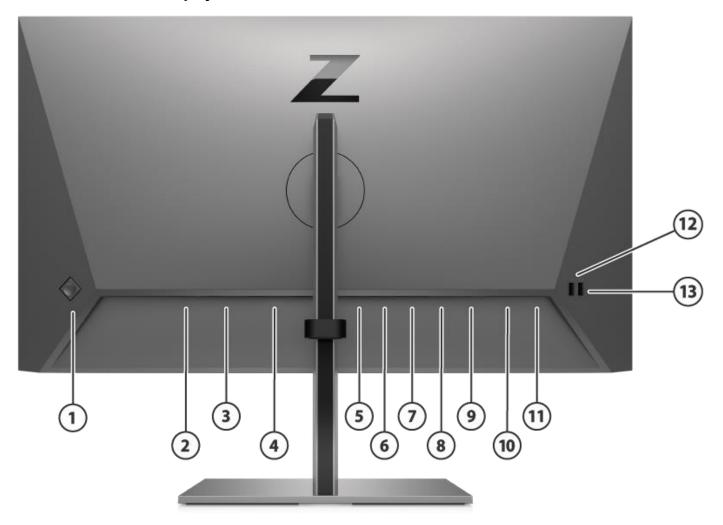

- 1. OSD control
- **2.** Security cable slot
- 3. Master power switch
- 4. Power connector
- 5. HDMI port
- **6.** DisplayPort connector
- 7. DisplayPort connector OUT

Back

- **8.** USB Type-C[™] port with DP Alt Mode 1.4, USB upstream data, and maximum power delivery up to 100 W
- 9. RJ-45 (network) jack
- 10. USB port
- **11.** USB port (Battery charging 1.2, 7.5W)
- 12 USB port
- **13.** USB port (Battery charging 1.2, 7.5W)

Technical Specifications

Panel Specifications Display Size (Diagonal) 27"

Panel Technology IPS Refresh Rate 60 Hz **Panel Bit Depth** 8 bit **Aspect Ratio** 16:9 **Brightness (Typical)** 350 nits **Contrast Ratio (Static)** 1000:1 **Contrast Ratio Minimum (Static)** 700:1 **Dynamic Contrast Ratio** 10M:1 Flicker Free Yes

Pixel Pitch 0.2331(mm) x 0.2331(mm)

Pixels Per Inch (Ppi) 109 PPI Backlight Lamp Life Minimum (To Half 40 k

Brightness - In Hours)

Backlight TypeEdge-litScreen TreatmentAnti-glareHardness3HHaze25%

Response Time (Typical) 5ms GtG (with overdrive)

Horizontal Viewing Angle (Typical 178°

Cr>10)

Vertical Viewing Angle (Typical Cr>10) 178°

Panel Active Area (W X H) 596.736(H) x 335.66(V)

NOTE: Performance Specifications Represent The Typical Specifications Provided By HP's Component

Manufacturers; Actual Performance May Vary Either Higher Or Lower.

Color sRGB 99 %

P3 D65 85%

Color Management Factory Color Calibrated Yes (Delta E <= 2)

Calibrated Color Presets sRGB, BT.709, P3 D65 (Production after Jan '21)

RGB Channel Adjust Yes, Gain
Default Color Temperature SRGB

Monitor Specifications Bezel 4-sided Micro Edge

Color (Head) Turbo Silver; (Stand) Turbo Silver

 Tilt
 -5 to +20°

 Swivel
 ±45°

 Pivot
 ±90

 Height Adjust Range
 150mm

 VESA Mounting
 N/A

Security Lock Ready Standard Security Lock Slot

Detachable Stand Yes

Warranty (Number Of Years) 3/3/0 for LA, NA, EMEA, APJ; (3/3/3 in select APJ Countries)
Low Blue Light Mode Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution

certified)

Display Management Software HP Display Center



Technical Specifications

On Screen Display Brightness +, Color, Image, Input, Power, Menu,

Management, Information, Exit

User-Assignable Function Buttons
Native Resolution

Native ResolutionQHD (2560×1440)Maximum Resolution $2560 \times 1440 @ 60H$ Preset Graphic Modes/Suppored $640 \times 480@60Hz$

Preset Graphic Modes/Suppored Resolutions

2560 x 1440 @ 60HZ 640 x 480@60Hz 800 x 600@60Hz 1280 x 720@60Hz 1024 x 768 @ 60Hz 1280 x 1024 @ 60Hz

Yes, 4 buttons

1260 x 1024 @ 60Hz 1440 x 900 @ 60Hz 1600 x 900 @ 60Hz 1680 x 1200 @ 60Hz 1920 x 1080 @ 60Hz 1920 x 1200 @ 60Hz 2560 x 1440 @ 60Hz 720 x 480i @ 60Hz

High Definition Video Formats

720 x 480p @ 60Hz 1280 x 720p @ 60Hz 1920 x 1080i @ 60Hz 720 x 576i @ 50Hz 720 x 576p @ 50Hz 1280 x 720p @ 50Hz 1920 x 1080p @ 50Hz 1920 x 1080p @ 60Hz 1920 x 1080p @ 50Hz 1920 x 1080p @ 60Hz 1920 x 480p @ 60Hz

Minimum Vertical Scan Rate50 HzMaximum Vertical Scan Rate60 HzMinimum Horizontal Scan Rate30.0 kHzMaximum Horizontal Scan Rate90.0 kHzMaximum Pixel Clock250 MHzUser Programmable Modes10

Languages 10 (English, Spanish, German, French, Italian, Netherlands,

Portuguese, Japanese, T-Chinese and S-Chinese)

Connector Types DisplayPort™ 1.4 1 DisplayPort™ 1.4

DisplayPort™ Out 1 DisplayPort™ 1.4-out

HDMI 1 HDMI 2.0

USB Type-C™ Video Input 1 USB Type-C™ (DP Alt Mode 1.4, power delivery up to

100W)

USB- A 4 USB-A 3.2 Gen1 (2 for battery charging 1.2, 7.5W)

Yes

Yes

Ethernet Yes

Special Features Picture-in-Picture, Picture-by-Picture

DaisyChain/DisplayPort Multi stream

Transport (MST)

User Updateable Firmware Yes

Technical Specifications

Power & Operating	Power Supply	Internal
Specs	Power Source	100 – 240 VAC 50 / 60 Hz
	Power Consumption- MAX	160 W
	Energy Saving/Stand By Mode	0.5 W
	Power Consumption- Typical	39 W
	Power Cable Length	1.9 m
	-	
ENERGY STAR Data	Operational Mode at 100 VAC	21.33W
	Operational Mode at 115 VAC	21.36W
	Operational Mode at 230 VAC	21.44W
	•	
Eu Energy Efficiency Class (ERP lot-5)	On-mode Power Consumption	23.7W
	Annual Power Consumption	35 kWh
	Energy Efficiency Class	F
Operating Conditions	Operating Temperature - Celsius	5° – 35°C
	Operating Temperature - Fahrenheit	41° – 95°F
	Non-Operatin Temperature - Celsius	−34° − 60°C
	Non-Operating Temperature -	29° – 140°F
	Fahrenheit	
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)
	Non-Operating Humidity	5 – 95%
	Operating Altitude	0 – 5,000 m (16,400 ft.)
	Non-operating Altitude	0 – 12.192 m (40,000 ft.)
Funiversatel	Maria Carles Parks Ladella Car	Voc. Marchael Content of the United States
Environmental Features and	Mercury-free LED display backlighting	Yes, Mercury-free LED backlighting
Certifications	Arsenic-Free Display Glass	Yes
cerementions	Low Halogen	Yes
		WW application
		CE,CB,KC/KCC/NOM/PSB/EAC/GS/TUV-S/ISO 9241-307/
	Agency Approvals and Certifications	Low Blue Light/ BIS/cTUVus/CCC/CEL/CECP/SEPA/Energy
		Star/TCO/TCO Certified
		Edge/VCCI/FCC/BSMI/WEEE/UAE/Ukraine/ERP/ISC
	Microsoft WHQL Certification	Yes
	ENERGY STAR® Certified	Yes
	EPEAT® Registered	Yes
	Regions need to verify by country	
	China Energy Label	CEL Grade 1
	TCO Certified Edge	Yes
	TCO Certified	Yes
	SmartWay Transport Partnership - NA only	Yes (NA sku)
Contains Recycled Plastics	Contains Recycled Plastics	81.06%
	Recyclable Packaging (Box, packing materials)	100% recyclable packaging.



Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

QuickSpecs

Technical Specifications

		Metric	Imperial			
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	61.23 x 20.5 x 53.04 cm	24.11 x 8.07 x 20.88 in			
	Product Dimensions (Packed) (W x D x H)	69.8 x 42.3 x 16.3 cm	27.48 x 16.65 x 6.42 in			
	Display Head Dimensions (Unpacked without stand) (W x D x H)	61.23 x 3.89x 35.61 cm	24.11 x 1.53 x 14.02 in			
	Base Area Footprint (w x d mm)	246 x 205 mm	9.69 x 8.07 in			
	Bezel Measurement	601.8 mm	23.69 in			
	Product Weight (Unpacked with stand)	6.2 kg	13.7 lb			
	Product Weight (Packed)	9.4 kg	20.7 lb			
	Product Weight (Head Only)	4.7 kg	10.36 lb			
What's in the box?	Documentation kit					
	DP1.4 Cable (1.8m)					
	HDMI 2.0 cable (1.8m, Production after May'21)					
	USB 3.2 Gen2 Type C to C (1m)					
	Power cable					
	VESA Adapter					
	Cable Holder					
User Guide and Warranty Languages	User Guide Languages	English, Arabic, S. Chinese,	English, Arabic, S. Chinese, T. Chinese, Czech, Danish,			
		Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.				
	Warranty Languages	English, Arabic, S. Chinese,	T. Chinese, Czech, Danish,			



Turkish.

Technical Specifications

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log					
January 12, 2021	V1 to V2	Update	Technical Specifications		
February 28,2021	V2 to V3	Update	Energy Efficiency Class		
April 16, 2021	V3 to V4	Update	VESA Mounting Specs		
June 1, 2021	V4 to V5	Update	Color Management		
June 24, 2021	V5 to V6	Update	What's in the box? section		

